CS156b Project1

Letter Recognition — Generalization

Ling Li
Learning Systems Group, Caltech
November 27, 2001

log & inv

Suppose hypothesis h_t has error ϵ_t. For simple boost, I tried two ways to assign weight to h_t:

- log: $1/\log(1.01 + \epsilon_t)$
- inv: $1/\epsilon_t$

They didn't show much difference.

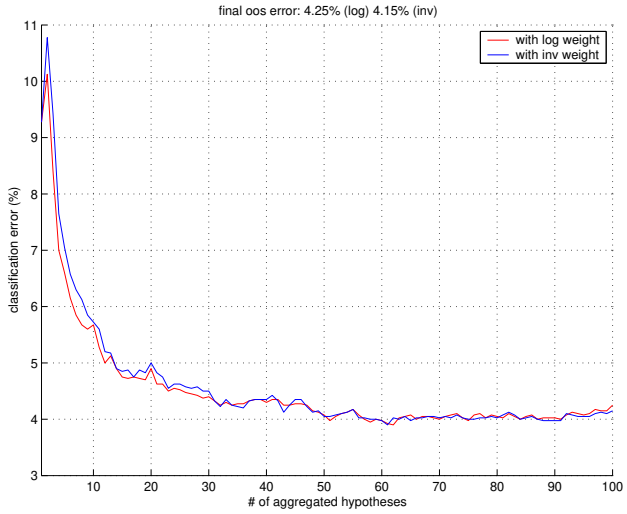

with SG, 16-70-50-26

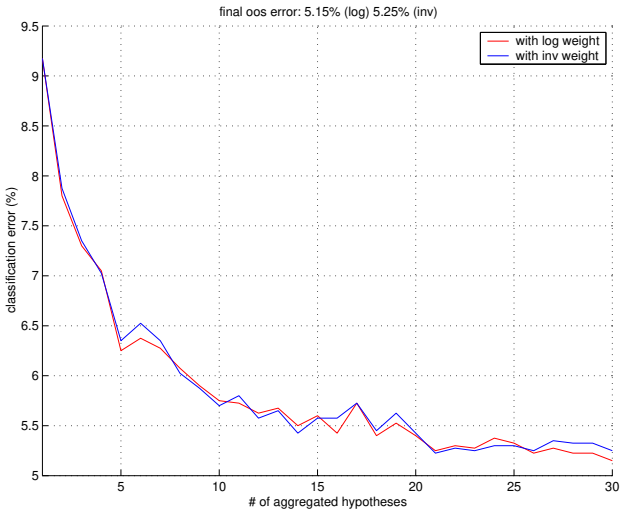

with MM, 16-70-50-26

Possible causes

- ϵ_t is small ($0.015 \sim 0.045$), thus

$$\log(1.01 + \epsilon_t) \approx 0.01 + \epsilon_t$$

- boosting is insensitive to small weight changes (?)

Towards the final (best) hypothesis

- Use 12000 samples for training and 3997 for testing
- Select the one with smallest testing error out of no more than 3 candidates

Generalization

Let the out-of-sample error be Π. The size of the never-touched test set is T.

The classification error $e_i \in \{0, 1\}$ for test sample i is an unbiased estimate of Π. Thus the testing error

$$\nu = \frac{1}{T} \sum_{i=1}^{T} e_i$$

is also an unbiased estimate of Π.

For big T, ν can be regarded as a Gaussian with mean Π and standard deviation

$$\sigma = \sqrt{\frac{\pi(1-\pi)}{T}} \approx \sqrt{\frac{\nu(1-\nu)}{T}}.$$

The 95% confidence interval of Π is

$$[\nu - 1.96\sigma, \nu + 1.96\sigma]$$

since

$$\int_{1.96}^{\infty} \frac{1}{\sqrt{2\pi}} e^{-x^2/2} dx \approx 2.5\%.$$

One candidate

For AdaBoost.M2 with stochastic gradient descent, I got $\nu = 2.752\%$. Then with high probability Π is within
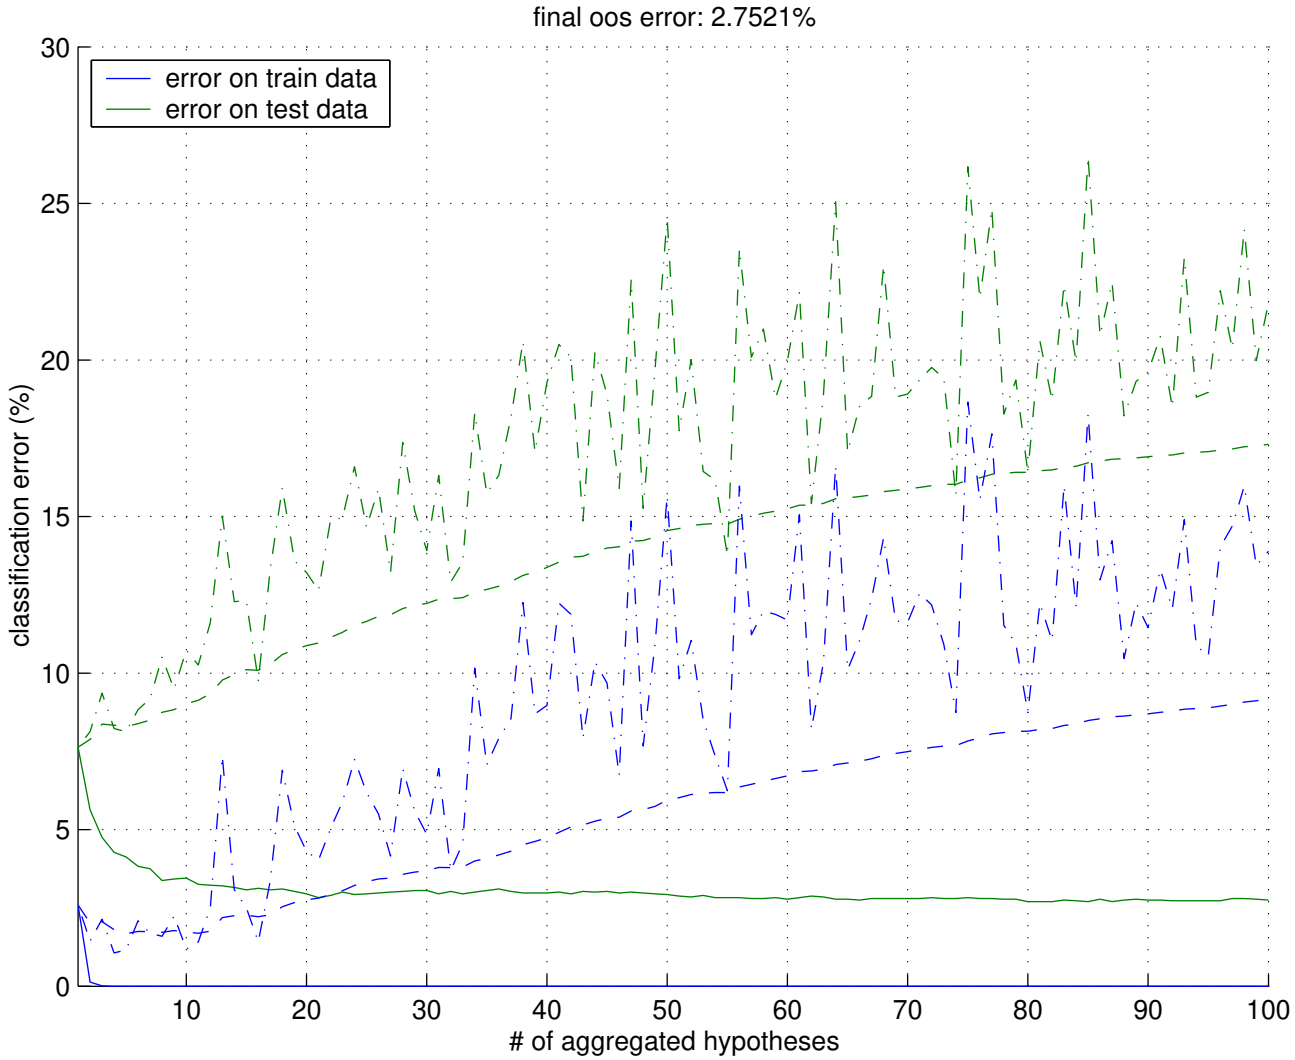
$$[2.24\%, 3.26\%]$$